



YC1051

(W)

Bluetooth BLE + 2.4GHz-Proprietary

Datasheet

Yichip Microelectronics

©2014

Revision History

Version	Date	Author	Description
preliminary	2019-04-01	L.D	Initial version
V1.1	2019-04-09	L.D	Modified Pin Function Description
V1.2	2019-04-19	L.D	Update Schematic

General Description

The YC1051(W) is a very low power, high performance and highly integrated Bluetooth BLE + 2.4G Proprietary triple-mode solution, designed for operation over the 2400MHz to 2483.5Mhz ISM frequency band.


YC1051(W) is manufactured using advanced 55nm CMOS low leakage process, which offers highest integration, lowest power consumption, lowest leakage current and reduced BOM cost while simplifying the overall system design. Rich peripherals including an 8 channel general purpose ADC, power-on-reset (POR), Arithmetic Accelerators, 1axis Q-decoder, ISO7816, UART/SPI/I2C and up to 23 GPIOs, which further reduce overall system cost and size.

YC1051(W) operates with a power supply range from 1.8 to 5.5V and has very low power consumption in both Tx and Rx modes, enabling long lifetimes in battery-operated systems while maintaining excellent RF performance. The device can enter an ultra low power sleep mode in which the registers and retention memory content are retained while low power Oscillator and sleep timer is ON.

Key Features

- Bluetooth BLE+2.4GHz-Proprietary triple-mode RF SOC
- Very Low Power Consumption
 - 10nA shut down mode (external interrupts)
 - 620nA sleep mode (32kHz RC OSC, sleep timer and register ON)
 - 2uA retention mode (32kHz RC OSC, sleep timer, 2k retention memory and register ON)
 - Rx peak current @3V (ideal DCDC)
 - 6.75mA in BLE/2.4G mode
 - Tx peak current @3V (-2dBm, ideal DCDC)
 - 16.5mA in BLE/2.4G mode
 - Rx peak current w/o DCDC
 - 16mA in BLE/2.4G mode
 - Tx peak current w/o DCDC @ -2dBm
 - 22mA in BLE/2.4G mode
 - <25uA avg, 500ms sniff hold connection
- 2.4GHz Transceiver
 - Single-end RFIO
 - -93dBm in BLE mode
 - support 250kbps, 1Mbps data rates
 - Tx Power up to +6dBm
- Oscillators
 - 16M/24M/32M XTAL supported (default 24M)
 - 50M RC oscillator
 - Low Jitter 32K RC oscillator
- Single Core Digital Architecture
 - 32bit-Risc Core for link management
 - 80kB code ROM
 - 8kB code RAM
 - All RAMs can be set to retention mode
- Arithmetic Accelerators [Accuracy : (sign, 15b.16b)]
 - multi/div/sqrt
- Analog Peripherals
 - 8 channel ADC with 10 bit accuracy/3Msps
- Digital Peripherals
 - Two-wire Master (I2C compatible), upto 400kbps; UART(RTS/CTS) with HCI-H5 protocol, upto 3.25Mbps; SPI Master, upto 24Mbps
 - ISO7816
 - AES128 HW encryption
 - LED drive capability
 - PWM
 - 1 axis Q-decoder

Block Diagram

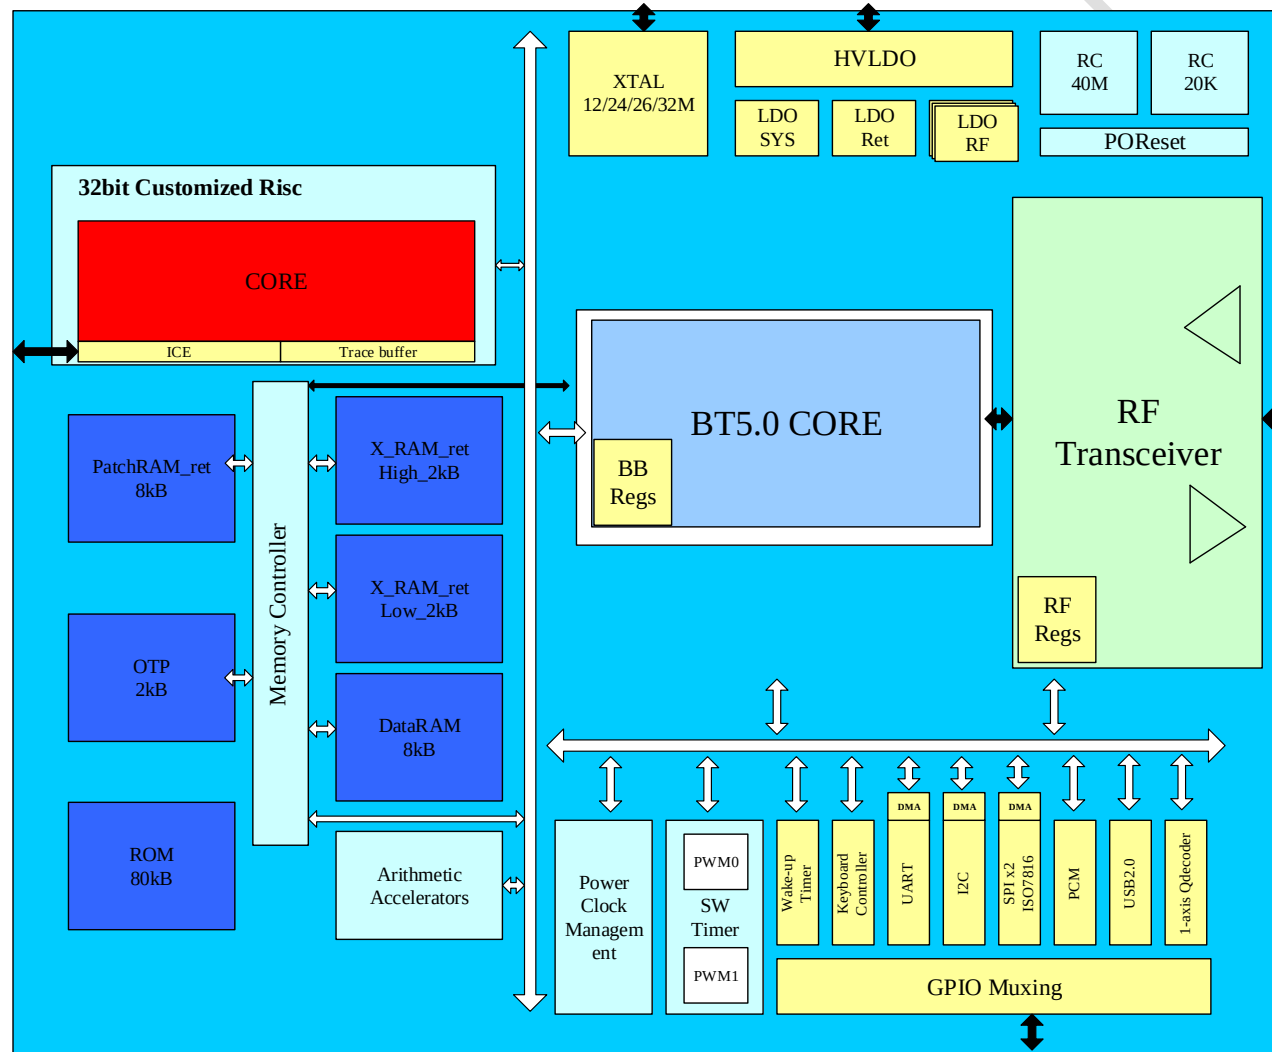

Electrical Specifications

Name	Parameter (Condition)	Min	Typ	Max	Unit	Com ment
Power Supplies						
HVIN	Voltage Input, typically 1uF decouple cap	3.1	4.2	5.5	V	(1)
HVOUT	Voltage Output, typically 1uF decouple cap, maximum 50mA load capability	2.75	2.85	2.95	V	
IQ_HV	Quiescent Current of high voltage LDO		750		nA	
VIN	Voltage Input, typically 1uF decouple cap	1.5		3.6	V	
VINPA	Voltage Input, typically 5pF decouple cap	1.5		3.6	V	(2)
VIO	Voltage Input	1.7		3.6	V	(3)
DVDD	Voltage Output, typically 1uF decouple cap	1.1	1.2	1.3	V	
VDDLPM	Voltage Output, typically 100nF decouple cap	1.1	1.2	1.3	V	
Temperature						
TEMP	Temperature	-20		+85	℃	
Digital Input Pin						
VIH	High Level	VIO-0.3		VIO+0.3	V	
VIL	Low Level	VSS		VSS+0.3	V	
Digital Onput Pin						
VOH	High Level	VIO-0.3		VIO+0.3	V	(4)
VOL	Low Level	VSS		VSS+0.3	V	
Current Consumption						
IVDD	Shut down mode, can only be waked up by wake-up pin.		10		nA	
IVDD	Retention mode (LPO, no retention RAM, POR, sleep timer, I/O interrupts ON), can be waked up by sleep timer & any GPIO		0.70		uA	(5)
IVDD	Retention mode (LPO, 2kB retention RAM, POR, sleep timer, I/O interrupts ON), can be waked up by sleep timer & any GPIO		1.25		uA	
IVDD	RX mode, BLE & 2.4G mode, 100% ON (with ideal DCDC @3V)		6.75		mA	(6)
IVDD	TX mode, BLE & 2.4G mode, 100% ON (with ideal DCDC @3V)		16		mA	(7)
IVDD	Average Current, 500ms sniff, hold connection			25	uA	
Normal RF Condition						
FOP	Operating Frequency	2400		2480	MHz	
FXTAL	Crystal Frequency	12	24	32		(8)
Transmitter Characteristics						
PRF	RF output power	-20	0	6	dBm	
CD	Carrier Drift Rate		5		kHz/50us	
PRF1	Out of band emission 2 MHz (GFSK)		-40		dBm	

PRF2	Out of band emission 3 MHz (GFSK)		-48		dBm	
BW	20dB bandwidth		0.9		MHz	
EVM	Modulation Accuracy, RMS DEVM ($\pi/4$ DQPSK)		7	20	%	
	Modulation Accuracy, RMS DEVM (8PSK)		7	13	%	
	Modulation Accuracy, 99% DEVM ($\pi/4$ DQPSK)		14	30	%	
	Modulation Accuracy, 99% DEVM (8PSK)		14	20	%	
	Modulation Accuracy, Peak DEVM ($\pi/4$ DQPSK & 8PSK)		18	35	%	
	Modulation Accuracy, Peak DEVM (8PSK)		18	25	%	
PRF1	Out of band emission 2 MHz ($\pi/4$ DQPSK & 8PSK)		-30	-20		
PRF2	Out of band emission 3 MHz ($\pi/4$ DQPSK & 8PSK)		-42	-40		

Receiver Characteristics


	BT5.0 (BLE)					
SEN	High Gain mode, Sensitivity @0.1%		-93		dBm	
SEN	Standard Gain mode, Sensitivity @0.1%		-87		dBm	
MaxIn	Maximum Input Power		0		dBm	
C/ICO	Co-channel C/I, Basic Rate, GFSK		7		dB	
C/I1ST	ACS C/I 1MHz, Basic Rate, GFSK		5.5	7	dB	
C/I2ND	ACS C/I 2MHz, Basic Rate, GFSK		-36	-34	dB	
C/I3RD	ACS C/I 3MHz, Basic Rate, GFSK		-43		dB	
C/I1STI	ACS C/I Image channel, Basic Rate, GFSK		-34		dB	
C/I2NDI	C/I 1 MHz adjacent to image channel, Basic Rate, GFSK		-28		dB	

- (1) HVIN & HVOUT are input & output of a high voltage LDO which is integrated in YC1051(W), input voltage range from 3.1~5.5V, and maximum load capability upto 50mA. Typically used in Li_BAT (3.2~4.2V) or USB_Power(4.5~5.5V) applications. If input voltage is lower than 3.6V, HVIN & HVOUT should be left unconnected and YC1051(W) should be powered by VIN/VINLPM/VINPA directly.
- (2) If RF output power should be larger than -4dBm, VINPA should be larger than 2.5V.
- (3) VIO should always be powered ON in all working cycles.
- (4) Drive capability of GPIO[6:7] & GPIO[18:22] is up to 30mA, other GPIO's drive capability is 10mA
- (5) By default, 2kB retention memory is ON in retention mode. Up to 4kB retentionable X_memory available at the cost of extra 600nA retention mode current. Result based on standard gain mode
- (6) Result based on -2dBm Pout
- (7) 12M, 16M, 24M, 26M, 32M crystal supported, 24M by default

Crystal Oscillator

The crystal oscillator requires a crystal with an accuracy of ± 30 ppm as defined by the Bluetooth specification. Two external load capacitors in the range of 5 pF to 30 pF are required to work with the crystal oscillator. The selection of the load capacitors is crystal dependent. The recommended crystal specification shows

below.

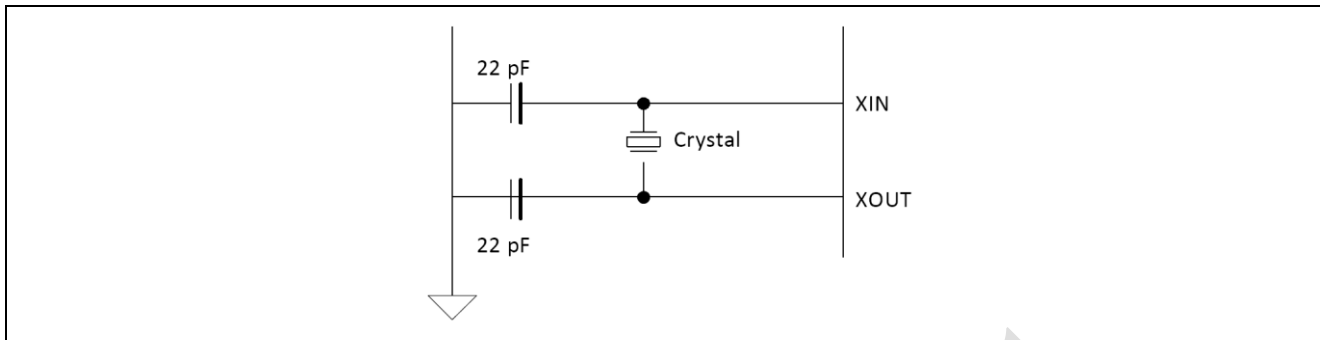

Recommended Oscillator Configuration — 20 pF Load Crystal

Reference Crystal Electrical Specifications

Name	Parameter (Condition)	Min	Typ	Max	Unit	Comment
Frequency			24		MHz	
Oscillation mode			Fundamental			
Frequency tolerance	@25 ℃		±10	±30	ppm	
Tolerance stability over temp	@0 ℃ to +70 ℃		±10	±30	ppm	
Load capacitance			20		pF	
Operating temperature range		-20		+70	degree	
Drive Level			100		uW	

Power consumption

W/O DC-DC	Parameter	Average Current	Unit
Sleep	/	700	nA
Sniff	500ms interval	21.99	uA
Discoverable	ADV interval: 640ms	65.97	uA

With DC-DC	Parameter	Average Current	Unit
Sleep	/	700	nA
Sniff	Sniff Interval: 500ms	17.92	uA
Discoverable	ADV interval: 640ms	53.76	uA

Bluetooth Security

- Pairing
 - Pin Code
- Security Simple Pairing

- Just Work(No input)
- Keyboard
- DisplayYesNo


MFi

Support Apple's MFi authentication and iAP1/iAP2 protocols.


Confidential

Bluetooth Stack

1. Serial Port Profile

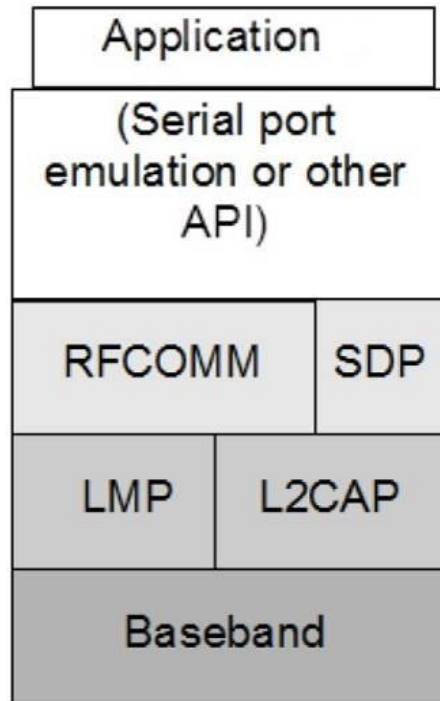


2. Generic Attribute Profile

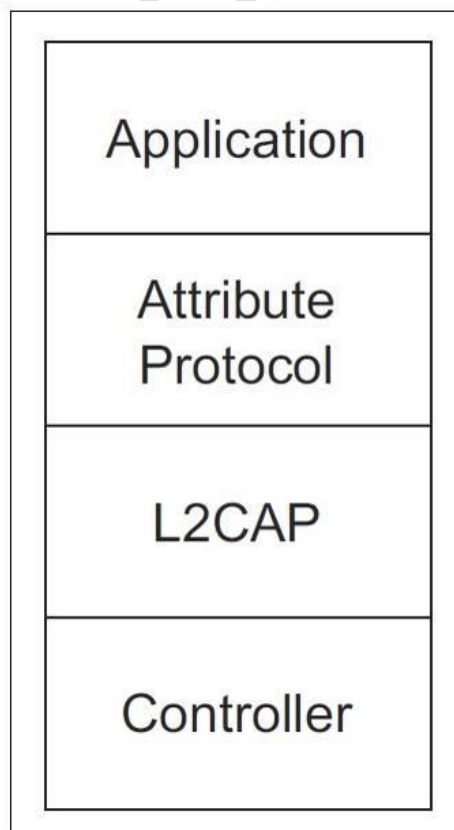

Application Schematic


1. Transparent transmission application

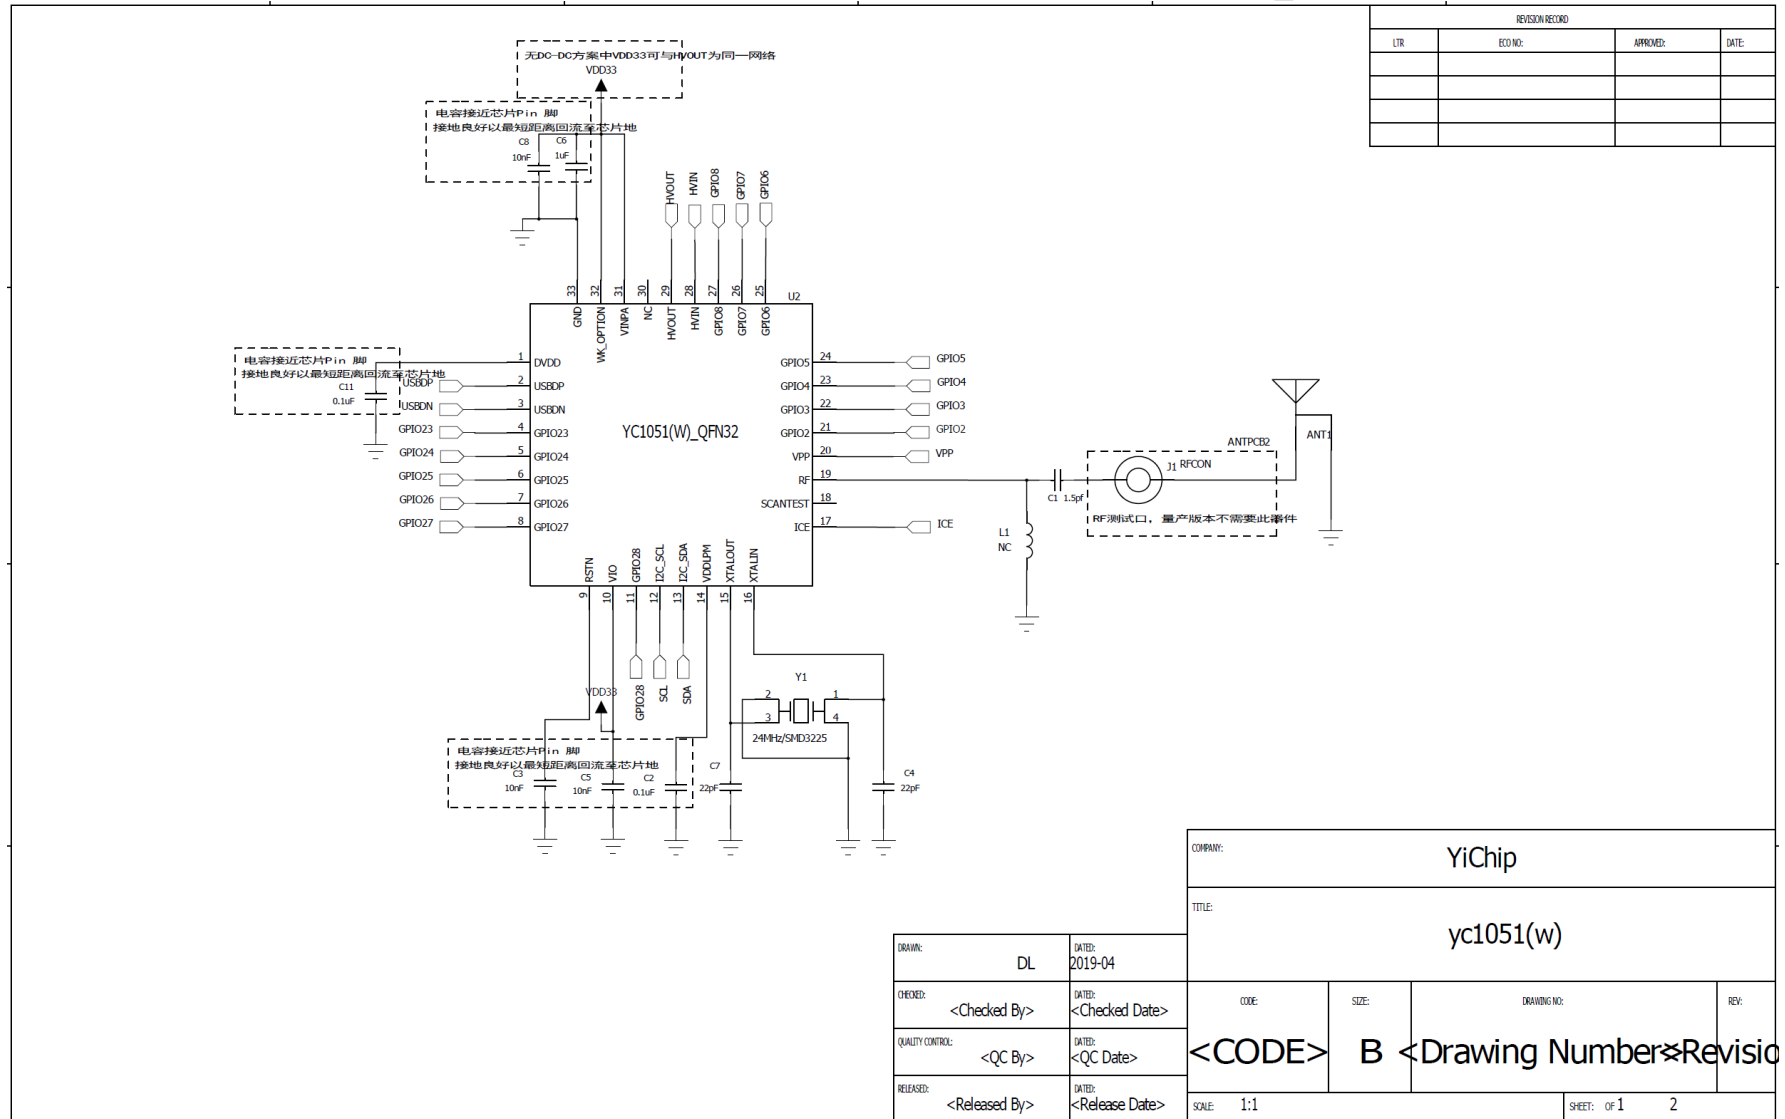


REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE:

DC-DC BUCK

注意:DC-DC为可选电路。有DC-DC时将VDD18与VDD33连成同一网络
选用DC-DC时,GP102选作EXEN功能

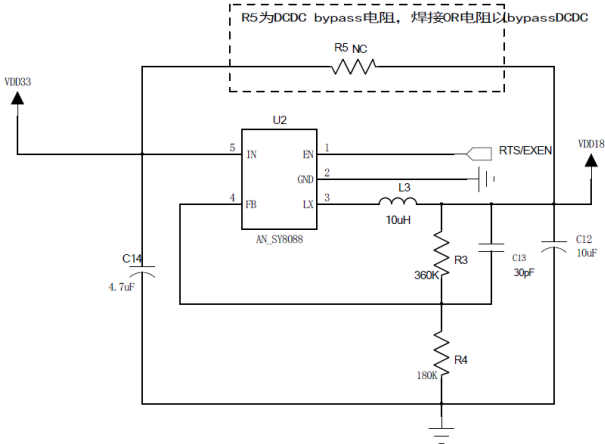


EEPROM (Optional)

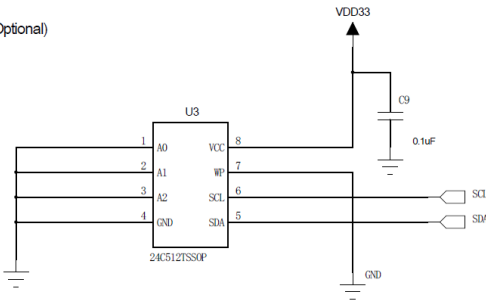

COMPANY: Yichip				
TITLE: YC1051(W)				
e>	CODE:	SIZE:	DRAWING NO:	REV:
<Code>	A3	<Drawing Number>		01
SCALE: <Scale>			SHEET: 2 OF 2	

Package Information

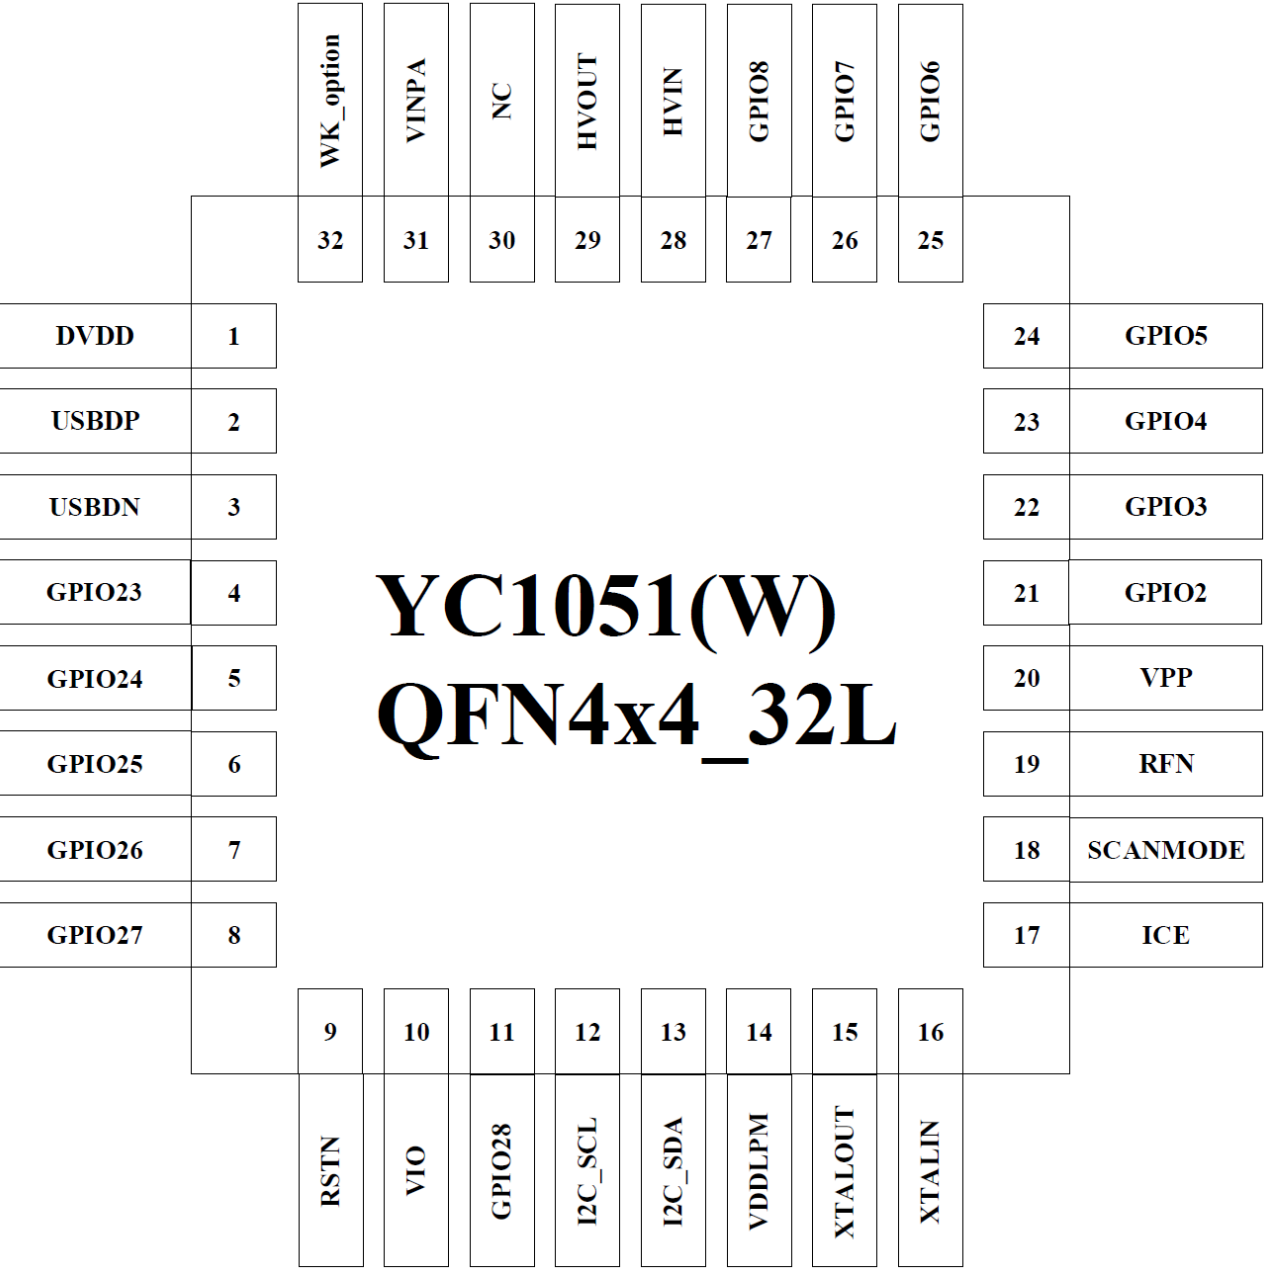

24

GPIO5

23

GPIO4

22

GPIO3

21

GPIO2

20

VPP

19

RFN

18

SCANMODE

17

ICE

32

WK_option

31

VINPA

30

NC

29

HVOUT

28

HVIN

27

GPIO8

26

GPIO7

25

GPIO6

YC1051(W)

QFN4x4_32L

4x4 32L	Pin Name	Type	Function Description
32	WK_OPTION	Power_I	Shut down mode select,active low.If not needed connect with VINPA.
1	DVDD	Power_O	internal LDO output, 1.2V. Need an external bypass cap here 1uF
2	USBDP	Dig_IO	USB port.
3	USBDN	Dig_IO	USB port.
/	GPIO17	Dig_IO	pls check "sheet: GPIO_Muxing"
/	GPIO18	Dig_IO	pls check "sheet: GPIO_Muxing"
/	GPIO19	Dig_IO	pls check "sheet: GPIO_Muxing"
/	GPIO20	Dig_IO	pls check "sheet: GPIO_Muxing"
/	GPIO21	Dig_IO	pls check "sheet: GPIO_Muxing"
/	GPIO22	Dig_IO	pls check "sheet: GPIO_Muxing"
4	GPIO23	Dig_IO	pls check "sheet: GPIO_Muxing"
5	GPIO24	Dig_IO	pls check "sheet: GPIO_Muxing"
6	GPIO25	Dig_IO	pls check "sheet: GPIO_Muxing"
7	GPIO26	Dig_IO	pls check "sheet: GPIO_Muxing"
8	GPIO27	Dig_IO	pls check "sheet: GPIO_Muxing"
9	RSTN	Dig_I	Gloable reset, active low. OR gated with internal POR. NC if not needed.
10	VIO	Power_I	I/O Power, 1.8~3.6V, 100nF//10pF bypass cap
11	GPIO28	Dig_IO	pls check "sheet: GPIO_Muxing"
/	GPIO29	Dig_IO	pls check "sheet: GPIO_Muxing"
/	GPIO30	Dig_IO	pls check "sheet: GPIO_Muxing"
/	GPIO31	Dig_IO	pls check "sheet: GPIO_Muxing"
12	I2C_SCL	Dig_IO	Internal pull up 1Kohm to VIO and no need external pull up resistor.
13	I2C_SDA	Dig_IO	Internal pull up 1Kohm to VIO and no need external pull up resistor.
14	VDDLPM	Power_O	internal LDO output, 1.2V. Need an external bypass cap here 100nF
15	XTALOUT	Ana_O	XTAL port
16	XTALIN	Ana_I	XTAL port, or external CLK in
17	ICE	Dig_IO	debug port, Tx & Rx
18	SCANMODE	Dig_I	SCAN Test enable pin
19	RFN	RF Port	ANT port
/	RFP	RF Port	ANT port
/	GPIO0	Dig_IO	pls check "sheet: GPIO_Muxing"
/	GPIO1	Dig_IO	pls check "sheet: GPIO_Muxing"
20	VPP	Power_I	OTP Program Power, 6.5V
21	GPIO2	Dig_IO	pls check "sheet: GPIO_Muxing"
22	GPIO3	Dig_IO	pls check "sheet: GPIO_Muxing"
23	GPIO4	Dig_IO	pls check "sheet: GPIO_Muxing"
24	GPIO5	Dig_IO	pls check "sheet: GPIO_Muxing"
25	GPIO6	Dig_IO	pls check "sheet: GPIO_Muxing"
26	GPIO7	Dig_IO	pls check "sheet: GPIO_Muxing"

27	GPIO8	Dig_IO	pls check "sheet: GPIO_Muxing"
/	GPIO9	Dig_IO	pls check "sheet: GPIO_Muxing"
/	GPIO10	Dig_IO	pls check "sheet: GPIO_Muxing"
/	GPIO11	Dig_IO	pls check "sheet: GPIO_Muxing"
/	GPIO12	Dig_IO	pls check "sheet: GPIO_Muxing"
/	GPIO13	Dig_IO	pls check "sheet: GPIO_Muxing"
/	GPIO14	Dig_IO	pls check "sheet: GPIO_Muxing"
/	GPIO15	Dig_IO	pls check "sheet: GPIO_Muxing"
/	GPIO16	Dig_IO	pls check "sheet: GPIO_Muxing"
28	HVIN	Power_I	HV LDO input, 3~5.5V, 4.7uF bypass cap
29	HVOUT	Power_O	HV LDO output, 2.85V. Bypass cap need here, 1uF
30	NC	NC	NC
31	VINPA	Power_I	Tx_PA's power supply, 1.8~3.6V,100nF//5pF bypass cap

Note: Most GPIOs are by default configured to input status after power-on reset, except for GPIO2 & GPIO24/25/26 which are in output status. If a GPIO is not used as well as it is not configured to output, it can be connected to GND. But GPIO2 & GPIO24/25/26 MUST NOT be connect to GND at any time.

GPIO Muxing Table

GPIOs	Function1	Function2	Function-Ana
GPIO[0]			
GPIO[1]			
GPIO[2]	UARTRTS	EXEN	
GPIO[3]	UARTCTS	PWM OUT4	adc_channel1
GPIO[4]	PWM OUT0		adc_channel2
GPIO[5]	PWM OUT1		adc_channel3
GPIO[6]	UARTTX		adc_channel4
GPIO[7]	UARTRX		adc_channel5
GPIO[8]	PWM OUT5		wakeup
GPIO[9]	SPIMISO-B		
GPIO[10]	SPICS-B		
GPIO[11]	SPICLK-B		
GPIO[12]	SPIMOSI-B		
GPIO[18]			CMP-
GPIO[19]			CMP+
GPIO[20]	PWM OUT0		
GPIO[21]	PWM OUT1		
GPIO[22]	PWM OUT2		
GPIO[23]	SPIMISO		adc_channel6
GPIO[24]	SPICS		adc_channel7
GPIO[25]	SPICLK	TWSCLK	adc_channel8
GPIO[26]	SPIMOSI	TWSDAT	
GPIO[27]	PWM OUT2	ZA	
GPIO[28]	PWM OUT3	ZB	
GPIO[29]			
GPIO[30]	SCL	TWSCLK	
GPIO[31]	SDA	TWSDAT	
GPIO[32]	ICE		

Note: Drive capability of GPIO[3:5] & GPIO[27:29] is up to 100mA,GPIO8 internal pulldown also can drive 100mA, other GPIO's drive capability is 10mA.

Package Physical Dimension (QFN4x4_32L)

